


Low profile ridge vent installs with hammer or nail gun

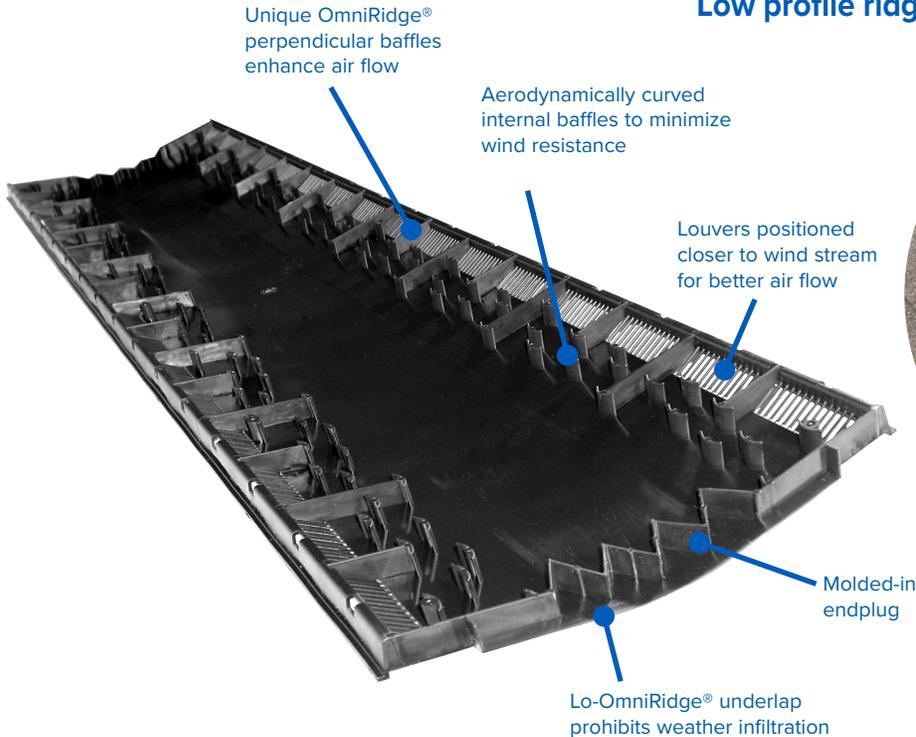

LOR9-4 FEATURES:

- Pneumatic nail gun or hammer installed
- Internal aerodynamic curved baffles
- External perpendicular omni baffles
- Weatherproof underlapping joint
- Four drain holes per foot per side
- 11 square inches of net free area per linear foot
- External venturi baffle
- Pre-formed to 3/12 pitch
- Nail holes marked every 6 inches—supported every foot
- Molded nail lines
- Molded centerline for fast and easy alignment
- Alignment tabs
- External water shield
- Slot width guide lines
- Patented molded-in fanfolded endplug fits all roof pitches
- **Lifetime Limited Warranty**

LOR9-4 Ventilation Guide

Model	Length (ft.)	NFA (in. ²)	Roof Pitch	Per Box
LOR9-4	4'	44	2/12 to 16/12	10

	Attic floor space in square feet					
Area Ventilated	1000	1500	2000	2500	3000	3500
LOR9-4 Required	22'	33'	44'	55'	66'	77'
Intake Required(in. ²)	242	363	484	605	726	847